

WORKGROUP COLOUR SCANNER

fi-5015C



Scans 15 pages per minute in black/white or colour.

50 page automatic feeder.

Easy connectivity with USB 2.0 interface.

Letter size flatbed.

ENERGYSTAR® and RoHS compliant.

One year warranty.



Adobe Acrobat
7.0 Standard


FUJITSU

THE POSSIBILITIES ARE INFINITE



Able to scan colour documents at an impressive 15 ppm

The fi-5015C is able to scan fifteen Letter size pages (150 dpi) a minute in colour. And in addition to being fast, an ability to continuously scan up to 50 pages at a time makes the fi-5015C ideal for speedily digitizing volumes of paper.

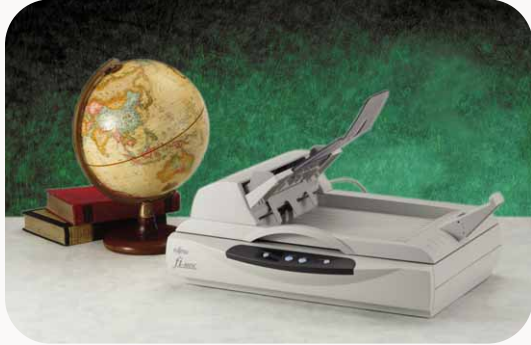

ADF / Flatbed tandem scanner

In addition to being able to continuously scan regular sized paper documents with its ADF, the fi-5015C is able to digitize bound documents, such as brochures, and irregularly sized documents with its flatbed. The result of this powerful ADF / flatbed tandem is that the fi-5015C can scan anything that end-users want to digitize.



Environmental compatibility

The fi-5015C is fully compliant with the RoHS Act, a European regulation, which places limits on the use of hazardous substances in electrical equipment. Furthermore, it is an ENERGYSTAR® compatible product that switches to an energy efficient sleep mode that uses 6 W or less when not in use.

TECHNICAL SPECIFICATIONS

Scanner type		ADF (Automatic Document Feeder) + Flatbed
Scanning modes		Simplex, Colour / Grayscale / Monochrome
Image sensor type		Colour CCD (Charge-coupled device) x1
Light source		White cold cathode discharge lamp
Scanning range	<i>ADF</i>	Maximum: 8.5" x 14" Minimum: 4.5" x 5.5"
	<i>Flatbed</i>	8.5" x 11.7"
Paper weight (Thickness)¹		14 to 34lb.
Scanning speed²	<i>ADF</i>	15 ppm (150 dpi colour ³ / 200 dpi greyscale ³ / 200 dpi monochrome)
(Letter, Portrait)	<i>Flatbed</i>	Approximately 5.3 seconds (200 dpi colour ³ /greyscale ³ /monochrome)
Paper chute capacity		50 sheets
Background colour		White
Optical resolution		600 dpi
Output resolution⁴		50 to 600 dpi (adjustable by 1 dpi increments)
(Colour/Greyscale/Monochrome)		
Output format		Colour: 24-bit, Grayscale: 8-bit, Monochrome: 1-bit
AD converter		1,024 levels (10-bit)
Interface⁵		USB2.0 / USB1.1
Connector shape		B type
Output mode (Half-tone)		Dither
Voltage or voltage range		AC 100 to 240 V, +10% / -10%
Power	<i>Operating</i>	24 W or less
	<i>Sleep mode</i>	Less than 6 W
Operational environment	<i>Temperature</i>	5°C to 35°C (42°F to 95°F)
	<i>Relative humidity</i>	10% to 80% (Non-condensing)
Dimensions⁶ (W x D x H)		445 mm x 332 mm x 179 mm (17.8" x 13.3" x 7.5")
Weight		5.5 kg (12 lb.)
Environmental compatibility		ENERGYSTAR® and RoHS®

CONSUMABLES

ScanAid kit	Up to 100,000 sheets or 1 year.
CG01000-519101	The kit includes 1 pick roller, 2 pad assemblies, and 1 cleaning kit.

SERVICE OPTIONS

Post warranty maintenance coverage	Provides post warranty remedial maintenance.
---	--

BUNDLED ITEMS

	AC adapter, AC cable, USB cable, ADF paper chute and extension, Document stopper, Pad assemblies, Setup CD-ROM, Adobe® Acrobat® CD-ROM, Getting Started Guide.
--	--

WARRANTY

	1 year, return to depot. Visit www.fujitsu.ca/warranty/scanner/ for more details.
--	--

1) Paper weight restrictions do not apply when scanning with the flatbed.

2) Actual scanning times may vary, due to data transmission and software processing times.

3) JPEG compression figures.

4) Actual maximum scanning range may vary from the designed maximum.

5) Excluding external attachments such as the hopper and stacker.

6) PFLU Limited, a Fujitsu company, has determined that this product meets RoHS requirements (2005/95/EC).

Fujitsu and the Fujitsu logo are registered trademarks of Fujitsu Limited. Adobe, the Adobe logo, AdobeAcrobat and the AdobeAcrobat logo are registered trademarks of Adobe Systems Incorporated in the United States and / or other countries. ISIS is an EMC Corporation product. Any other products or company names appearing in this document are the registered trademarks of the respective companies. Using a scanner to scan paper currency, securities or similar documents, for the purpose of duplicating them with a printer, is illegal and subject to legal penalties. As an ENERGYSTAR® partner, PFLU Limited, a Fujitsu company, has determined that this product meets the ENERGYSTAR® guidelines for energy efficient. ENERGYSTAR® is a registered trademark in the United States. Specifications are subject to change without notice.

© 2006 Fujitsu Canada, Inc. All rights reserved. FCI-12.04.2006-E



MultiCIM Technologies Inc.
14 Westminster N, suite 306C
Montréal-Ouest, QC, CANADA H4X 1Y8
T : (514) 633-6401 or 1 (877) MULTICIM
F : (514) 633-6495
sales@exadox.com



THE POSSIBILITIES ARE INFINITE